

Rannie 132T / Gaulin 132T

Introduction

The Rannie 132T / Gaulin 132T homogenizer, a positive displacement triplex, reciprocating plunger pump, is fitted with an application-specific homogenizing valve assembly: single-stage with hydraulic actuation.

The Rannie 132T / Gaulin 132T homogenizer incorporates a durable slow-speed power end that reduces vibration and noise. Easy access to the hydraulic actuation system, lubrication oil and other auxiliary systems simplifies maintenance saving time and money. Liquid end options include a three-piece valve housing (Rannie) or a mono-block design (Gaulin).

Design features of both the Rannie and Gaulin simplify routine maintenance. Materials for plungers, packings, pump valves, valve seats and seals are custom-selected for your application. SPX engineers will work with you to optimize the configuration for your specific application.

STANDARD OPTIONS

- Two-stage hydraulic valve actuation (HVA)
- Single-stage automatic hydraulic system (AHS)
- Two-stage automatic hydraulic system (AHS)
- Pulsation dampener(s) on inlet and outlet
- Aseptic cylinder design
- High-pressure outlet
- Inlet pressure gauge
- Plunger lubrication control package
- Micro-Gap homogenizing valve
- Tungsten carbide homogenizing valve
- Square plunger seals and ceramic plungers (Rannie valve housing only)
- External cooling fan/main motor
- Motor starter
- Control cabinet, stainless steel
- Thermostat/oil temperature




SPECIAL OPTIONS

- Acid-proof cylinder (Gaulin valve housing only)
- Ceramic plungers with U- or V-rings
- Explosion-proof design
- Electropolished wettables
- High-temperature design
- Flow switch - power end cooling
- UFO - Unit for Filtration of Oil




RANNIE THREE-PIECE
VALVE HOUSING



GAULIN MONO-BLOCK
DESIGN


RANNIE/THREE-PIECE VALVE HOUSING POPPET AND BALL TYPE VALVES

| TYPE | US MAX. CAP./MAX. PRESS. | | METRIC MAX.CAP./MAX. PRESS. | |
|--------|-----------------------------|-------|--------------------------------|------|
| | GPH | PSI | LPH | BAR |
| 85.140 | 5810 | 2900 | 22000 | 200 |
| 75.140 | 4490 | 3625 | 17000 | 250 |
| 70.140 | 3910 | 4300 | 15000 | 300 |
| 60.140 | 2905 | 5800 | 11000 | 400 |
| 50.140 | 1980 | 8700 | 7500 | 600 |
| 42.140 | 1350 | 11600 | 5100 | 800 |
| 38.140 | 1060 | 14500 | 4000 | 1000 |

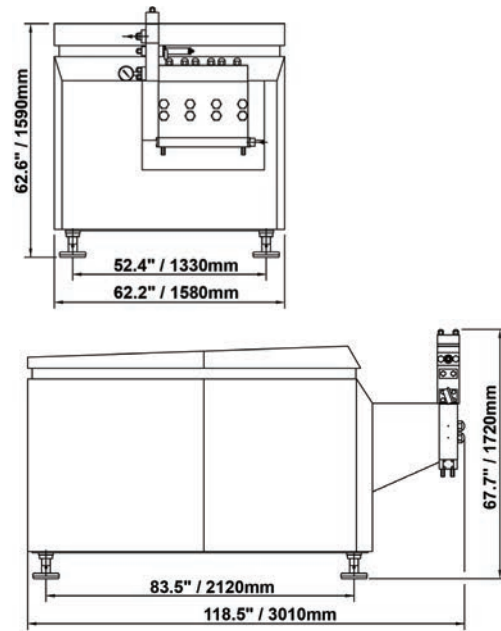

GAULIN/MONO-BLOCK DESIGN

| TYPE | US MAX. CAP./MAX. PRESS. | | METRIC MAX.CAP./MAX. PRESS. | |
|--------------------|-----------------------------|------|--------------------------------|-----|
| | GPH | PSI | LPH | BAR |
| POPPET TYPE VALVES | | | | |
| 3.0 | 5150 | 3000 | 19500 | 210 |
| 4.3 | 3435 | 4300 | 15000 | 300 |
| 5.8 | 2905 | 5800 | 11000 | 400 |
| BALL TYPE VALVES | | | | |
| 3.0 | 5020 | 3000 | 19000 | 210 |
| 4.3 | 3300 | 4300 | 14500 | 300 |
| 5.8 | 2775 | 5800 | 10500 | 400 |
| 8.7 | 1950 | 8700 | 7400 | 600 |

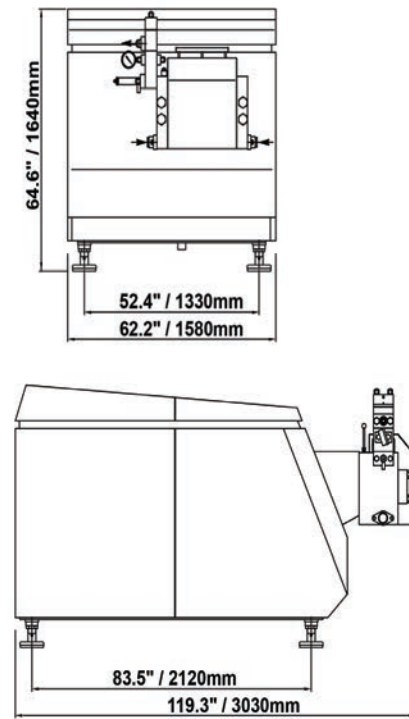

DIMENSIONS (SINGLE STAGE)

| DIMENSIONS PACKED IN A CRATE LXWXH (IN.) | DIMENSIONS PACKED IN A CRATE LXWXH (CM) | CUBIC MEASURE M3 | GROSS WEIGHT IN A CRATE INCL. MOTOR |
|---|--|------------------------|---|
| 124.4 X 82.2 X 77.2 | 311 X 178 X 193 | 10.7 | 12,570 LB. / 5,700 KG |

SPX®

611 Sugar Creek Road, Delavan, WI 53115

P: (262) 728-1900 or (800) 252-5200, F: (262) 728-4904 or (800) 252-5012, E: wcb@spx.com

SPX reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spx.com. The green ">" is a trademark of SPX Corporation, Inc.

ISSUED: 11/2012 3025-06-11-2012-US COPYRIGHT © 2002, 2012 SPX Corporation